



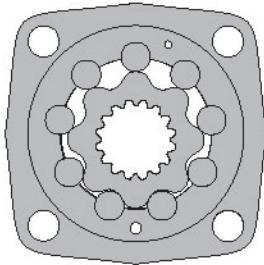

APPLICATION

- » Conveyors
- » Metal working machines
- » Agriculture machines
- » Road building machines
- » Mining machinery
- » Food industries
- » Special vehicles
- » Plastic and rubber machinery etc.



CONTENTS

Specification data	39
Function diagrams	41÷43
Permissible shaft loads	43
Dimensions and mounting	44÷46
Dimensions and mounting - MVS	47
Dimensions and mounting - MVV	48
Internal Spline data	49
Tacho connection.....	49
Shaft extensions	50
Order code	50

OPTIONS

- » Model- Disc valve, roll-gerotor
- » Flange and wheel mount
- » Short motor
- » Tacho connection
- » Speed sensoring
- » Side ports
- » Shafts- straight, splined and tapered
- » BSPP ports
- » Other special features


GENERAL

Max. Displacement,	cm³/rev [in³/rev]	801,8 [48.91]
Max. Speed,	[RPM]	630
Max. Torque,	daNm [lb-in]	cont.: 188 [16650] int.: 211 [18650]
Max. Output,	kW [HP]	64 [85,8]
Max. Pressure Drop,	bar [PSI]	cont.: 200 [2900] int.: 240 [3480]
Max. Oil Flow,	lpm [GPM]	240 [63.4]
Min. Speed,	[RPM]	5
Permissible Shaft Loads	daN [lbs]	P _a =1500 [3300]
Pressure fluid		Mineral based- HLP(DIN 51524) or HM(ISO 6743/4)
Temperature range,	°C [°F]	-40÷140 [-40÷284]
Optimal Viscosity range,	mm²/s [SUS]	20÷75 [98÷347]
Filtration		ISO code 20/16 (Min. recommended fluid filtration of 25 micron)

Oil flow in drain line

Pressure drop bar [PSI]	Viscosity mm ² /s [SUS]	Oil flow in drain line lpm [GPM]
140 [2030]	20 [98]	3 [.793]
	35 [164]	2 [.528]
210 [3045]	20 [98]	6 [1.585]
	35 [164]	4 [1.057]

Pressure Losses

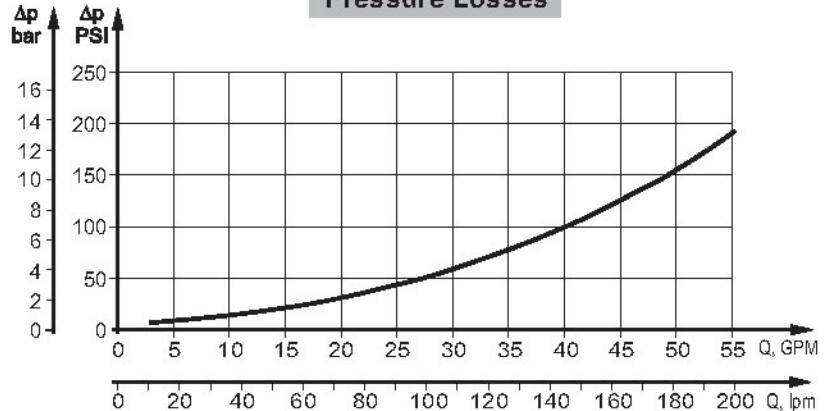

SPECIFICATION DATA

Type	MV 315	MV 400	MV 500	MV 630	MV 800
Displacement, cm³/rev [In³/rev]	314,5 [19.18]	400,9 [24.45]	499,6 [30.48]	629,1 [38.38]	801,8 [48.91]
Max. Speed, [RPM]	Cont. Int.*	510 630	500 600	400 480	320 380
Max. Torque daNm [lb-in]	Cont. Int.* Peak**	92 [8150] 111 [9800] 129 [11400]	118 [10450] 141 [12500] 164 [14500]	146 [12950] 176 [15550] 205 [18150]	166 [14700] 194 [17150] 221 [19550]
Max. Output kW [HP]	Cont. Int.*	42,5 [57] 51 [68.4]	53,5 [71.7] 64 [85.8]	53,5 [71.7] 64 [85.8]	48 [64.4] 56 [75]
Max. Pressure Drop bar [PSI]	Cont. Int.* Peak**	200 [2900] 240 [3480] 280 [4060]	200 [2900] 240 [3480] 280 [4060]	200 [2900] 240 [3480] 280 [4060]	180 [2610] 210 [3050] 240 [3480]
Max. Oil Flow lpm [GPM]	Cont. Int.*	160 [42.3] 200 [52.8]	200 [52.8] 240 [63.4]	200 [52.8] 240 [63.4]	200 [52.8] 240 [63.4]
Max. Inlet Pressure bar [PSI]	Cont. Int.* Peak**	210 [3050] 250 [3620] 300 [4350]	210 [3050] 250 [3620] 300 [4350]	210 [3050] 250 [3620] 300 [4350]	210 [3050] 250 [3620] 300 [4350]
Max. Return Pressure with Drain Line bar [PSI]	Cont. Int.* Peak**	140 [2040] 175 [2540] 210 [3050]	140 [2040] 175 [2540] 210 [3050]	140 [2040] 175 [2540] 210 [3050]	140 [2040] 175 [2540] 210 [3050]
Max. Starting Pressure with Unloaded Shaft, bar [PSI]		8 [120]	8 [120]	8 [120]	8 [120]
Min. Starting Torque daNm [lb-in]	At max. press. drop Cont. At max. press. drop Int.*	71 [6300] 85 [7500]	91 [8100] 109 [9600]	113 [10000] 136 [12000]	133 [11800] 155 [13700]
Min. Speed***, [RPM]		10	9	8	6
Weight, kg [lb]	MV MVW MVS	31,8 [70.1] 32,4 [71.4] 22,7 [50]	32,6 [71.9] 33,2 [73.2] 23,5 [51.8]	33,5 [73.8] 34,1 [75.2] 24,4 [53.8]	34,9 [76.9] 35,5 [78.3] 25,6 [56.4]
					36,5 [80.5] 37,1 [81.8] 27,7 [61.1]

* Intermittent operation: the permissible values may occur for max. 10% of every minute.


** Peak load: the permissible values may occur for max. 1% of every minute.

*** For speeds lower than given, consult factory or your regional manager.


1. Intermittent speed and intermittent pressure must not occur simultaneously.
2. Recommended filtration is per ISO cleanliness code 20/16. A nominal filtration of 25 micron or better.
3. Recommend using a premium quality, anti-wear type mineral based hydraulic oil HLP(DIN51524) or HM (ISO 6743/4). If using synthetic fluids consult the factory for alternative seal materials.
4. Recommended minimum oil viscosity 13mm²/s [70 SUS] at 50°C [122°F].
5. Recommended maximum system operating temperature is 82°C [180°F].
6. To assure optimum motor life fill with fluid prior to loading and run at moderate load and speed for 10-15 minutes.

FUNCTION DIAGRAMS

MV 315

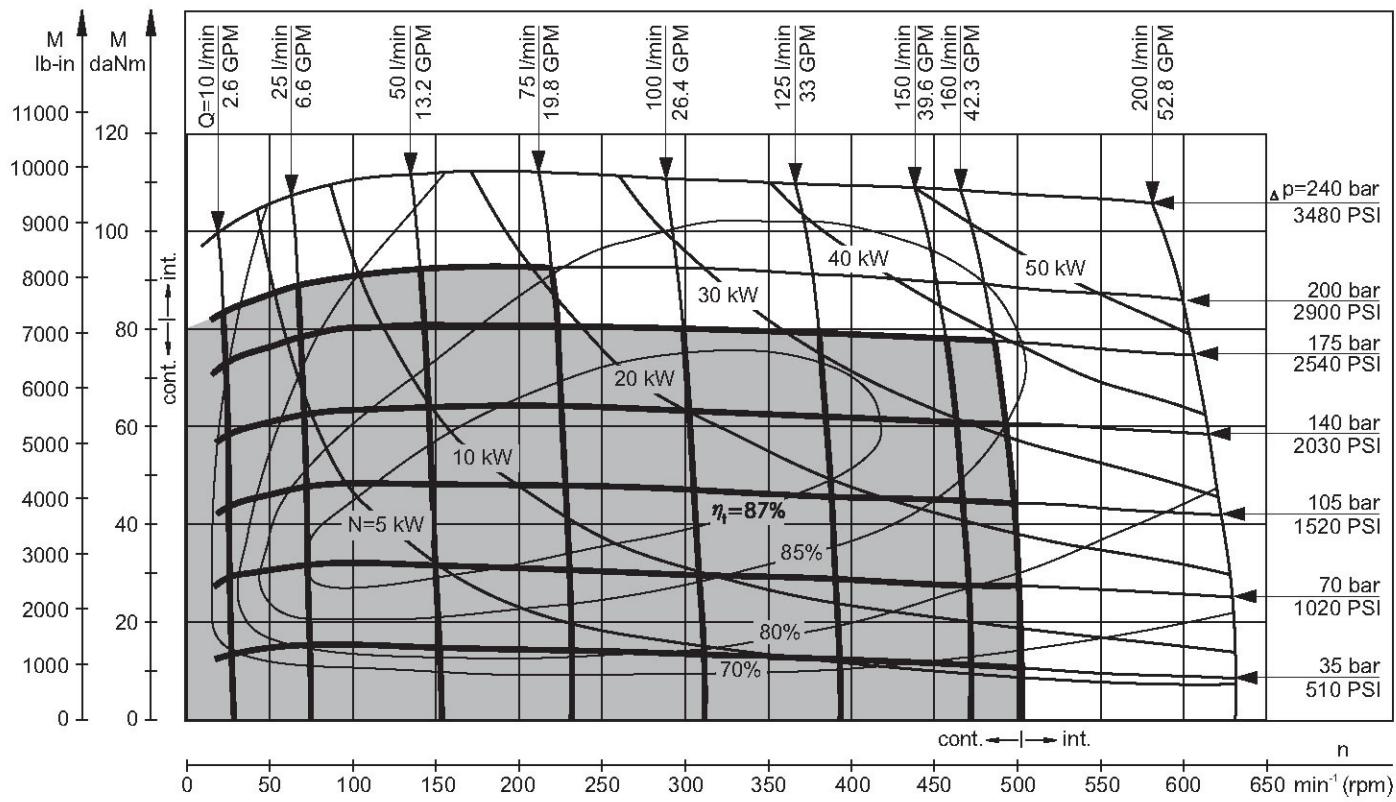


MV 400

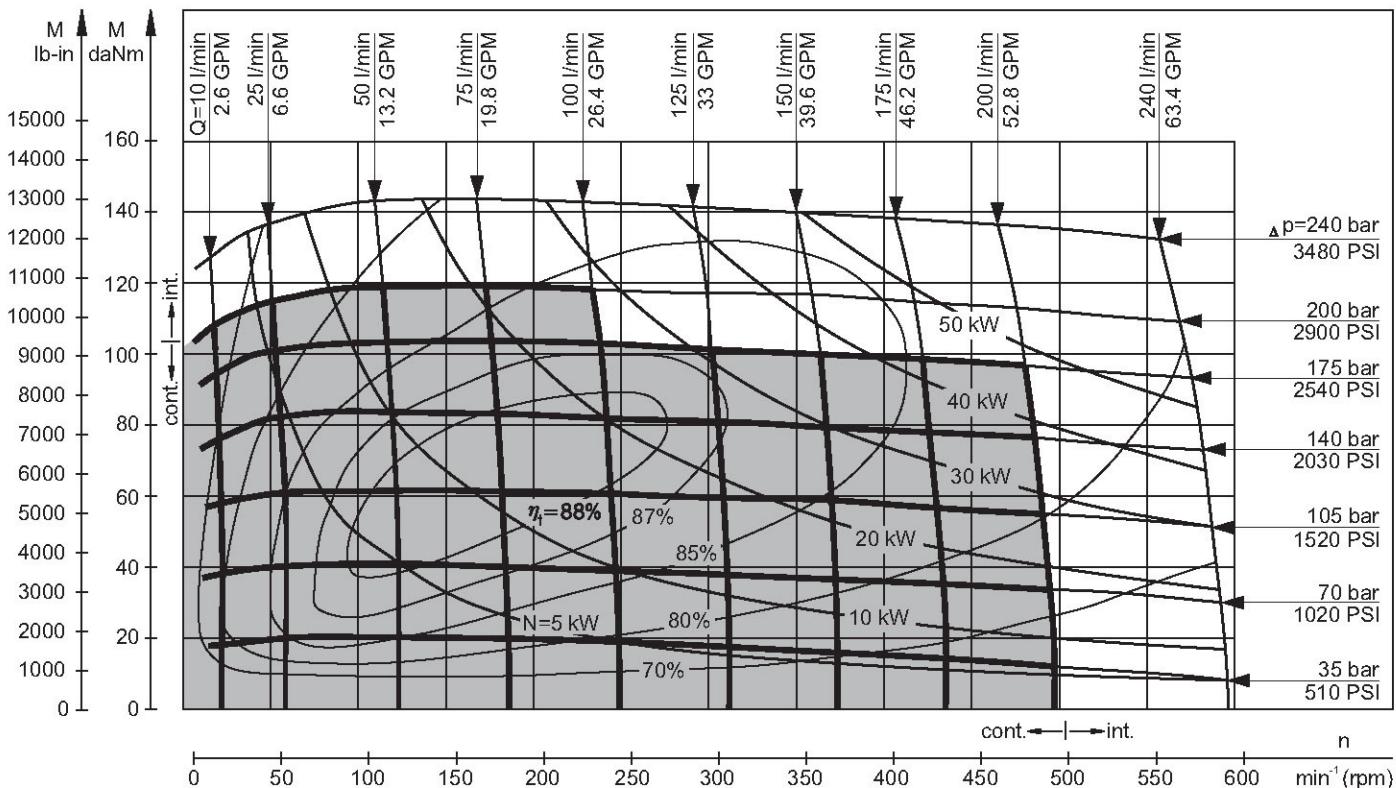


The function diagrams data is for average performance of randomly selected motors at back pressure 5÷10 bar [72.5÷145 PSI] and oil with viscosity of 32 mm²/s [150 SUS] at 50°C [122°F].

FUNCTION DIAGRAMS

MV 500

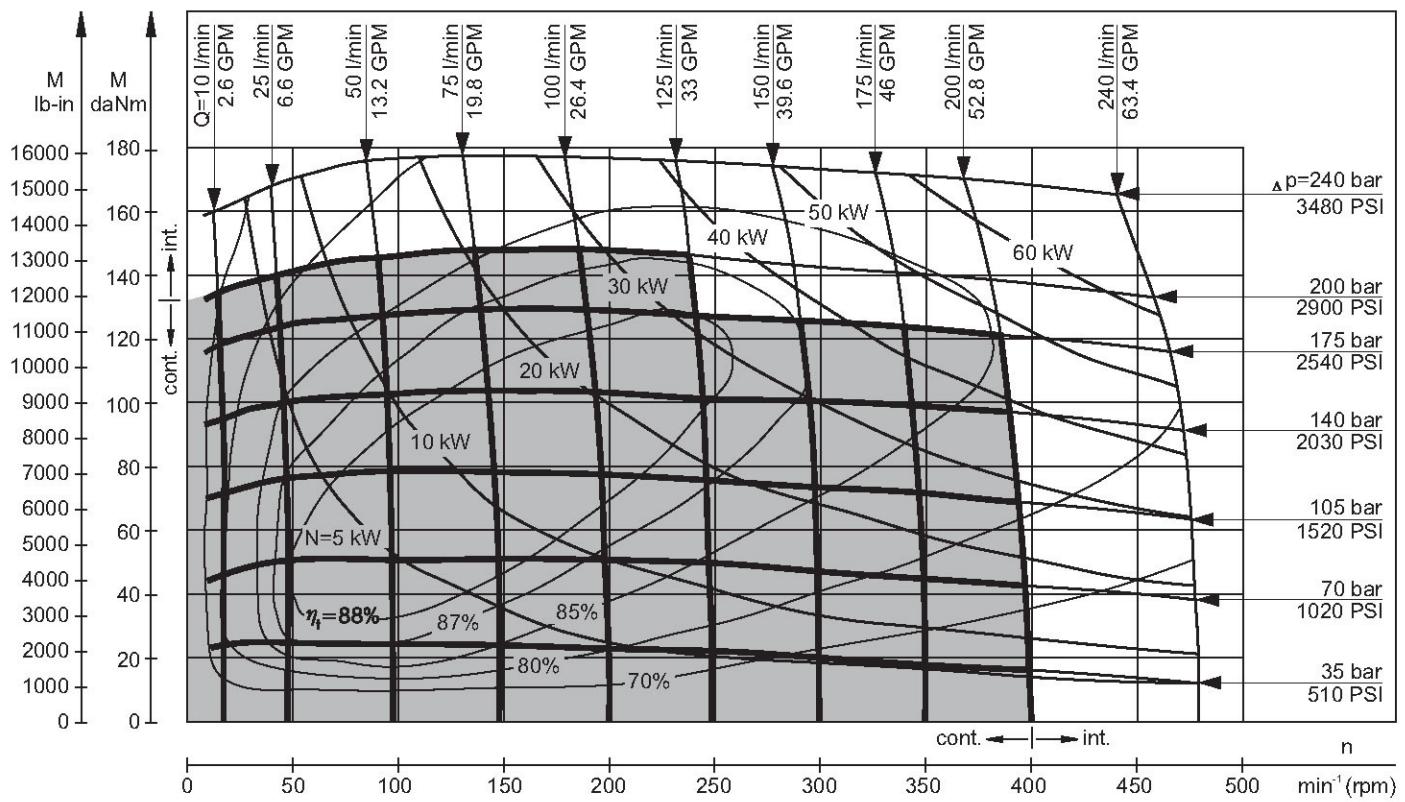


MV 630

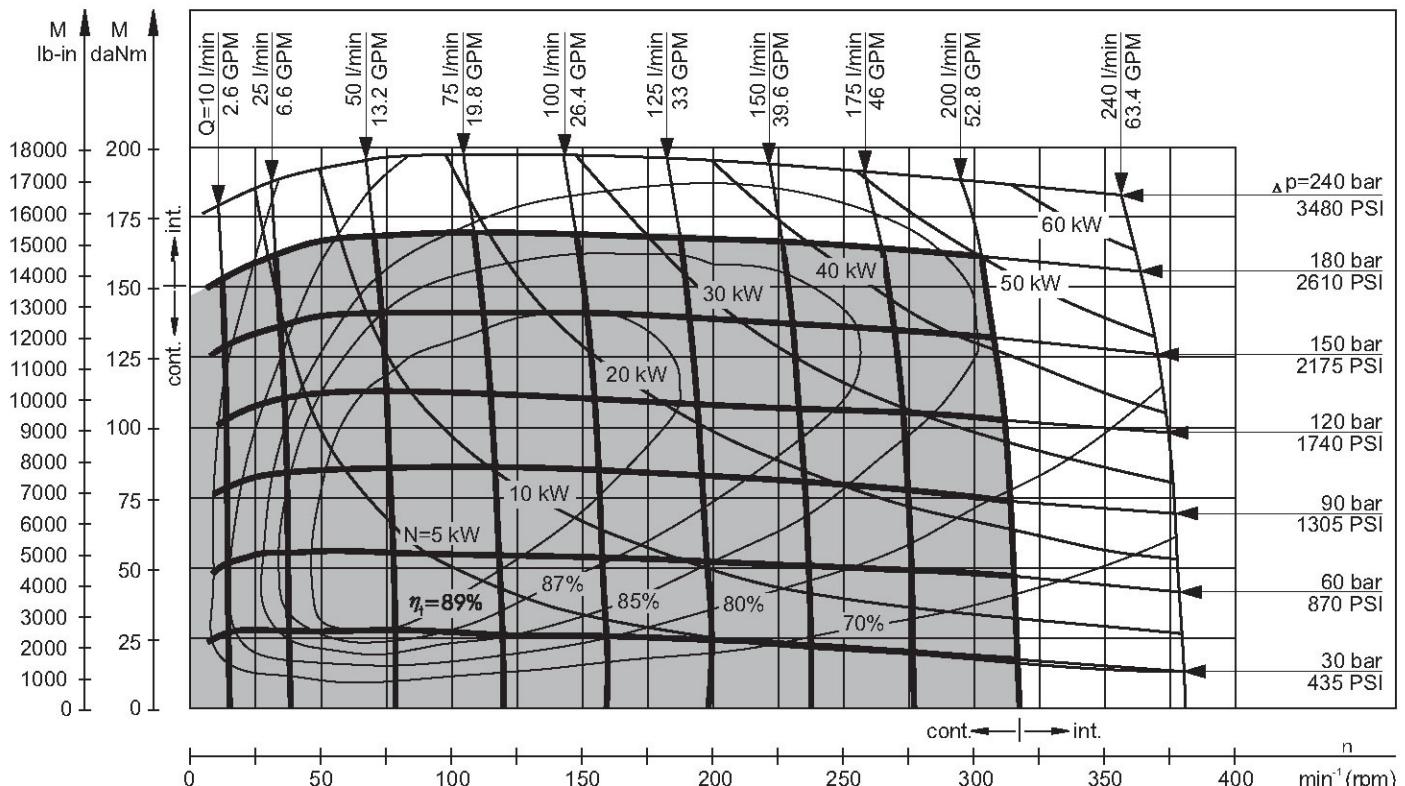

The function diagrams data is for average performance of randomly selected motors at back pressure 5÷10 bar [72.5÷145 PSI] and oil with viscosity of 32 mm²/s [150 SUS] at 50°C [122°F].

FUNCTION DIAGRAMS

MV 800

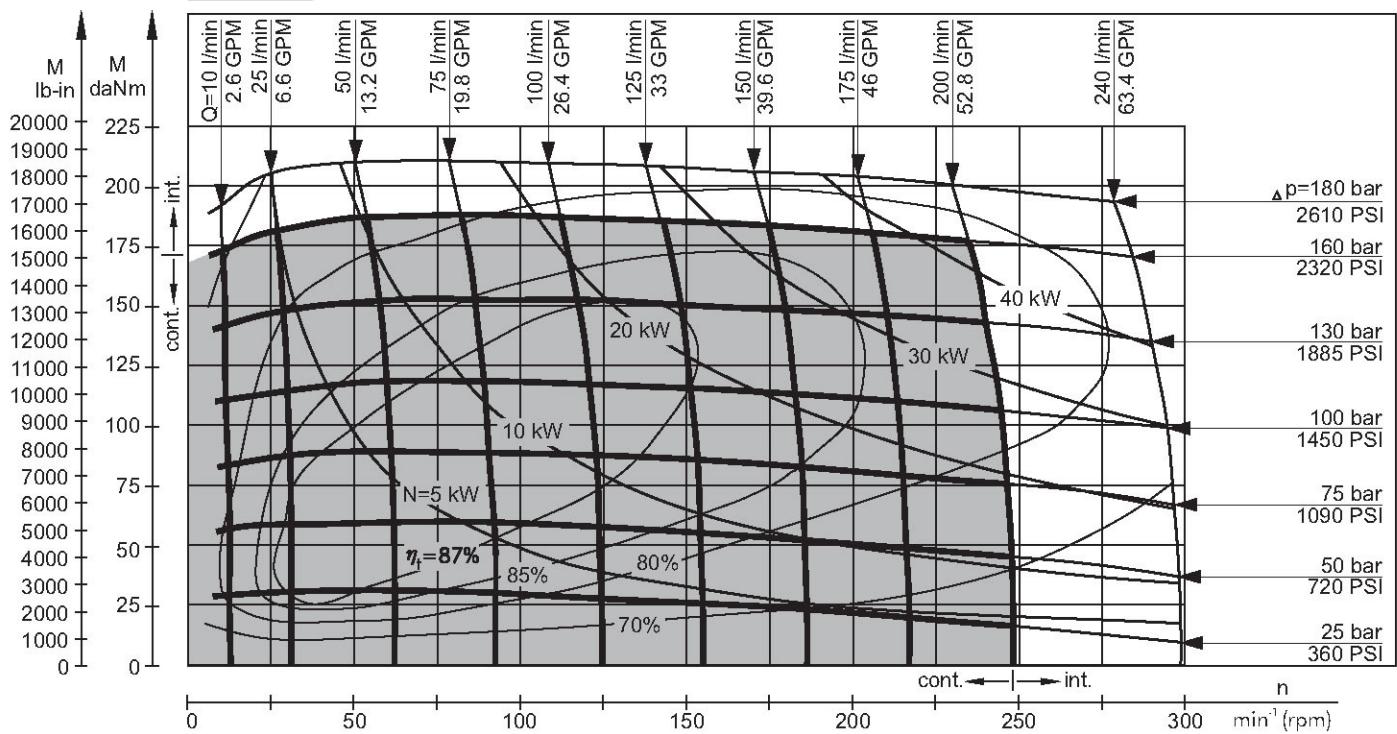



The function diagrams data is for average performance of randomly selected motors at back pressure
 5 ± 10 bar [72.5 \pm 145 PSI] and oil with viscosity of 32 mm²/s [150 SUS] at 50°C [122°F].

PERMISSIBLE SHAFT LOADS


The output shaft runs in tapered bearings that permit high axial and radial forces. The permissible radial load on the shaft is shown for an axial load of 0 N as function of the distance from the mounting flange to the point of load application. The curves apply to a B10 bearing life of 2000 hours at 100 RPM.

Curve "1" shows max. radial shaft load. Any shaft load exceeding the values quoted in the curve will seriously reduce motor life.


Mounting Flange:

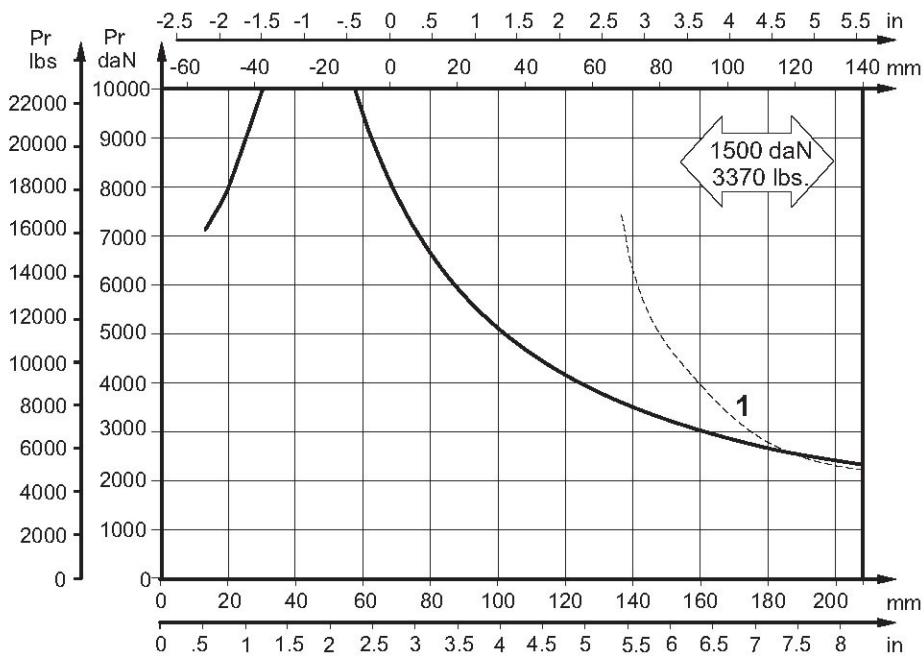

Standard




W - Wheel



SAE C

DIMENSIONS AND MOUNTING DATA - MV and MVC

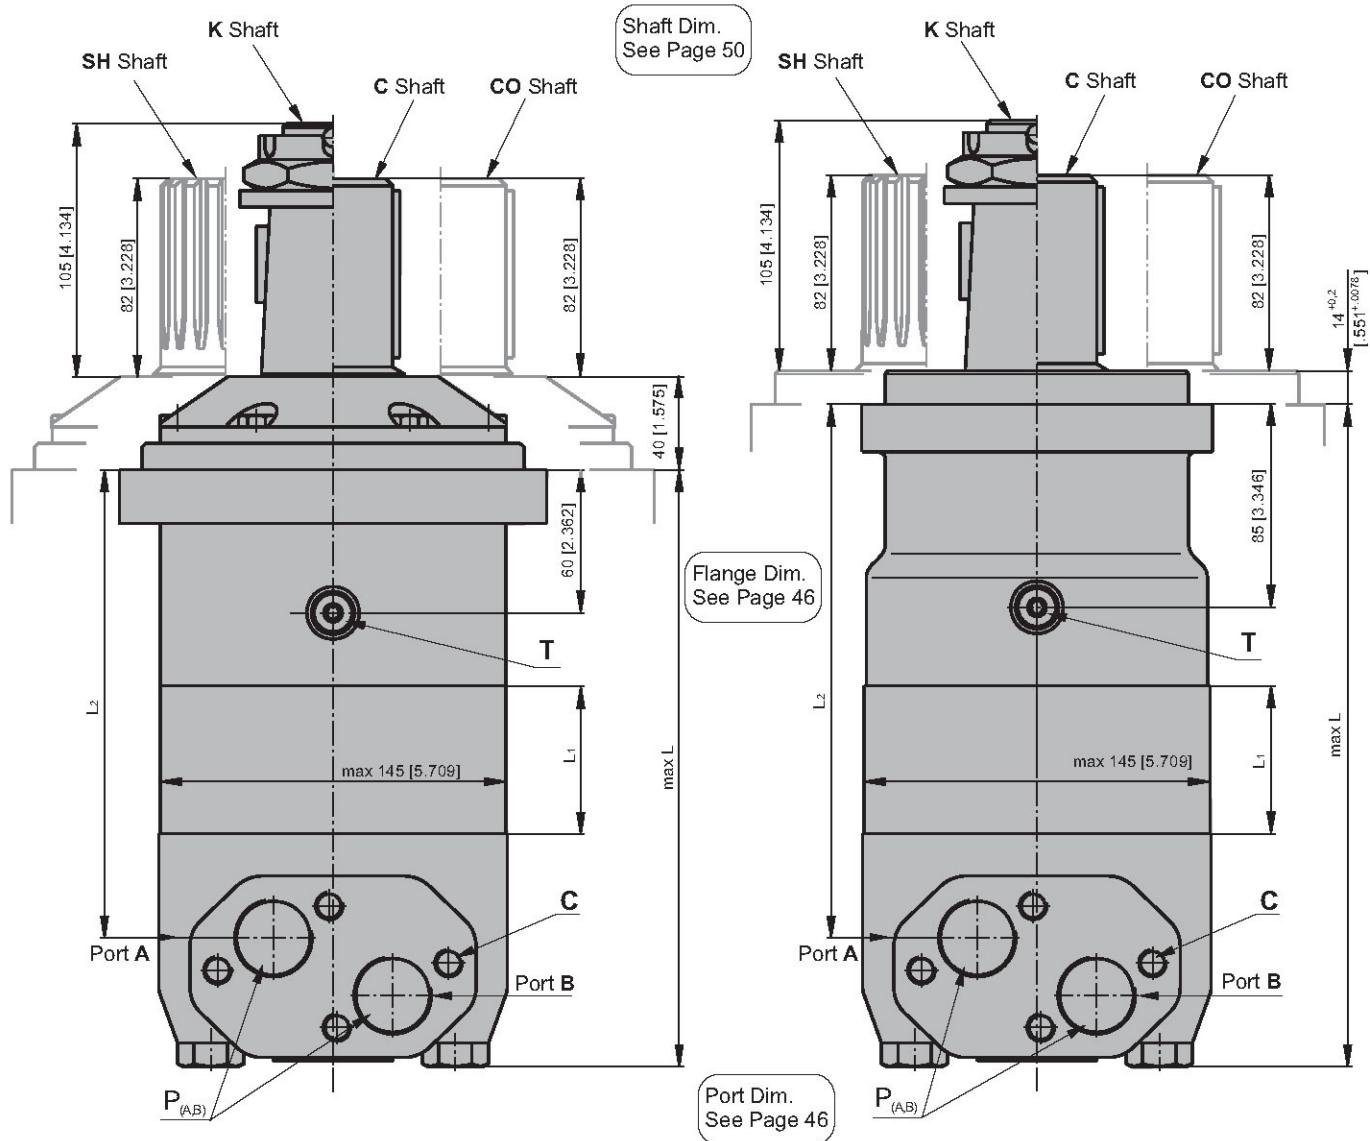

C: 4xM12 - 12 mm [.47 in] depth

P_(A,B): 2xG1 - 20 mm [.79 in] depth

T: G 1/4 - 12 mm [.47 in] depth

Standard Rotation

Viewed from Shaft End

Port A Pressurized - CW


Port B Pressurized - CCW

Reverse Rotation

Viewed from Shaft End

Port A Pressurized - CCW

Port B Pressurized - CW




mm [in]

Type	L, mm [in]	L ₂ , mm [in]	Type	L, mm [in]	L ₂ , mm [in]	*L ₁ , mm [in]
MV 315	214,5 [8.45]	160[6.30]	MVC 315	238,25 [9.38]	184,26 [7.25]	22,0 [.87]
MV 400	221,5 [8.72]	167[6.58]	MVC 400	245,25 [9.66]	191,26 [7.53]	29,0 [1.14]
MV 500	229,5 [9.04]	175[6.89]	MVC 500	253,25 [9.97]	199,26 [7.85]	37,0 [1.46]
MV 630	240,0 [9.45]	186[7.32]	MVC 630	263,75 [10.38]	209,76 [8.25]	47,5 [1.87]
MV 800	254,0 [10.0]	200[7.87]	MVC 800	277,75 [10.94]	223,76 [8.81]	61,5 [2.42]

* The width of the roll-gerotor is 4 mm [.157 in.] greater than L₁.

DIMENSIONS AND MOUNTING DATA - MVW

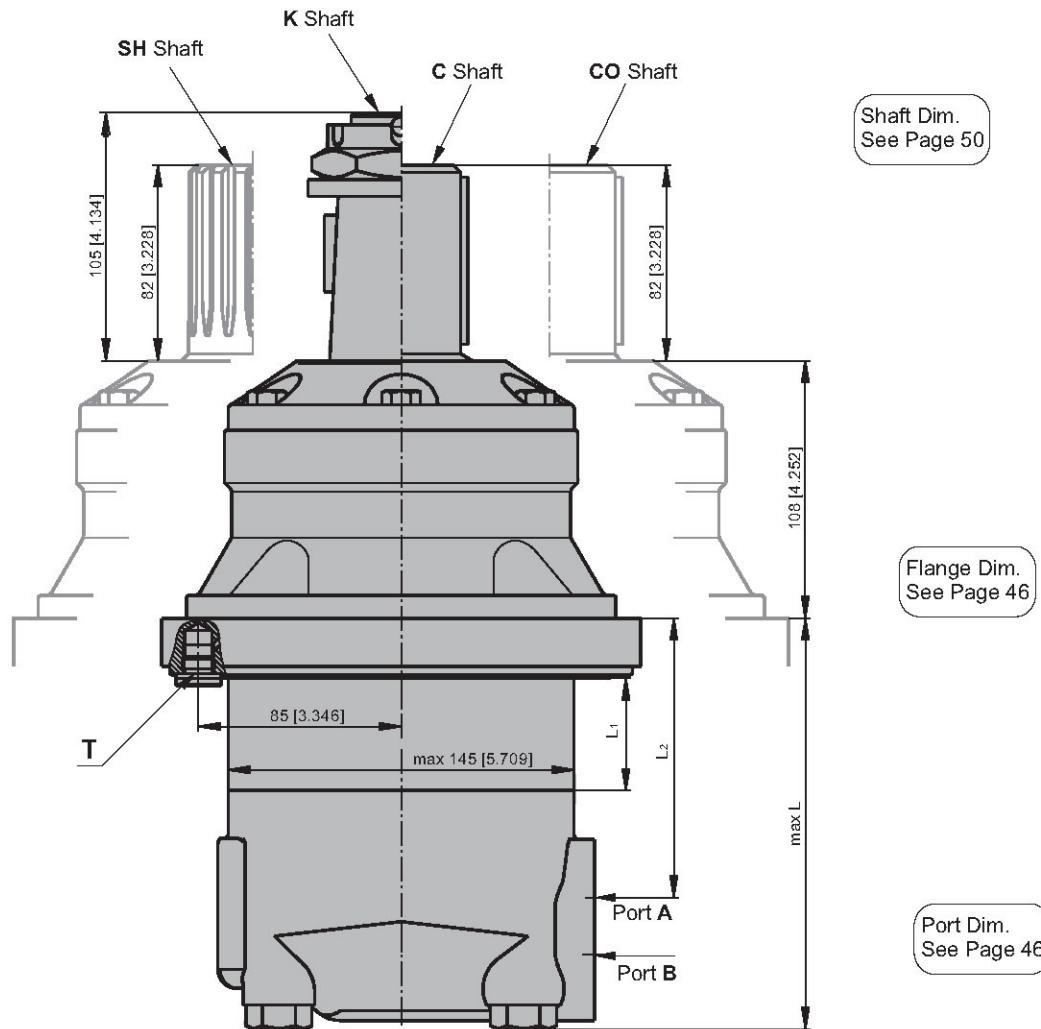

C: 4xM12 - 12 mm [.47 in] depth

P_(A,B): 2xG1 - 20 mm [.79 in] depth

T: G 1/4 - 12 mm [.47 in] depth

Standard Rotation

Viewed from Shaft End

Port A Pressurized - CW


Port B Pressurized - CCW

Reverse Rotation

Viewed from Shaft End

Port A Pressurized - CCW

Port B Pressurized - CW




mm [in]

Type	L, mm [in]	L ₂ , mm [in]	*L ₁ , mm [in]
MVW 315	146 [5.75]	92 [3.62]	22,0 [.87]
MVW 400	153 [6.02]	99 [3.90]	29,0 [1.14]
MVW 500	161 [6.34]	107 [4.21]	37,0 [1.46]
MVW 630	172 [6.77]	118 [4.65]	47,5 [1.87]
MVW 800	185 [7.28]	132 [5.20]	61,5 [2.42]


* The width of the roll-gerotor is 4 mm [.157 in.] greater than L₁.

MOUNTING


Square Mount (4 Holes)

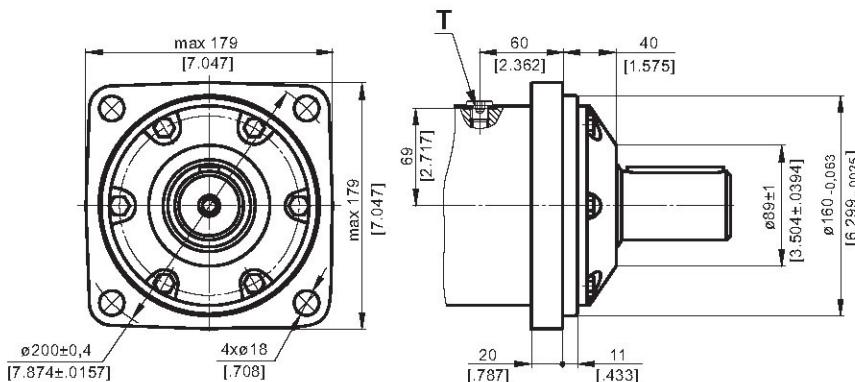

C SAE C Mount

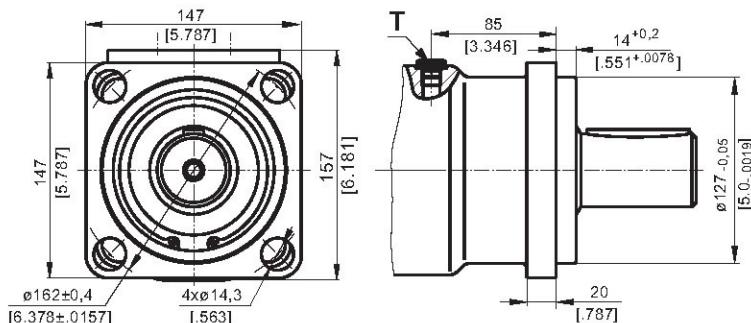


W Wheel Mount

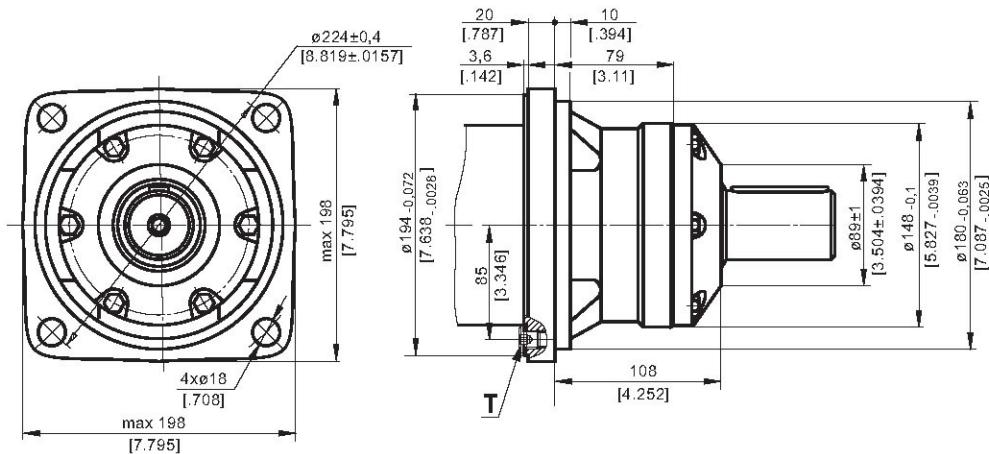

PORTS

Side Ports

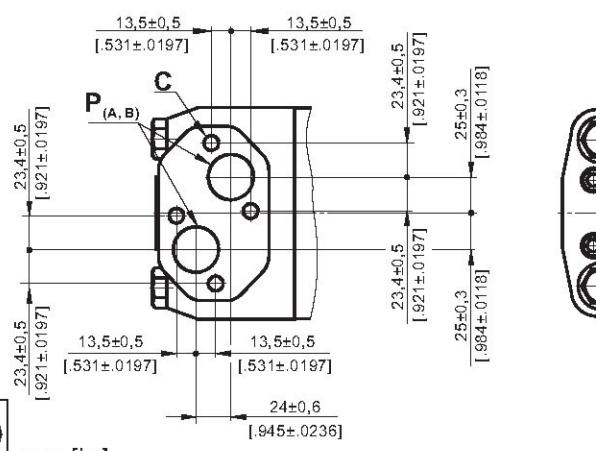



C: 4xM12 - 12 mm [.47 in] depth
 P_(A,B): 2xG1 - 20 mm [.79 in] depth
 T: G 1/4 - 12 mm [.47 in] depth

Standard Rotation

Viewed from Shaft End
 Port A Pressurized - CW
 Port B Pressurized - CCW

Reverse Rotation


Viewed from Shaft End
 Port A Pressurized - CCW
 Port B Pressurized - CW

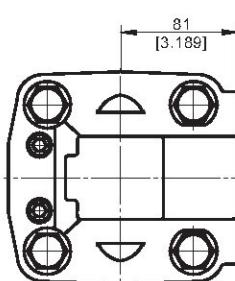

mm [in]

DIMENSIONS AND MOUNTING

S Short Mount

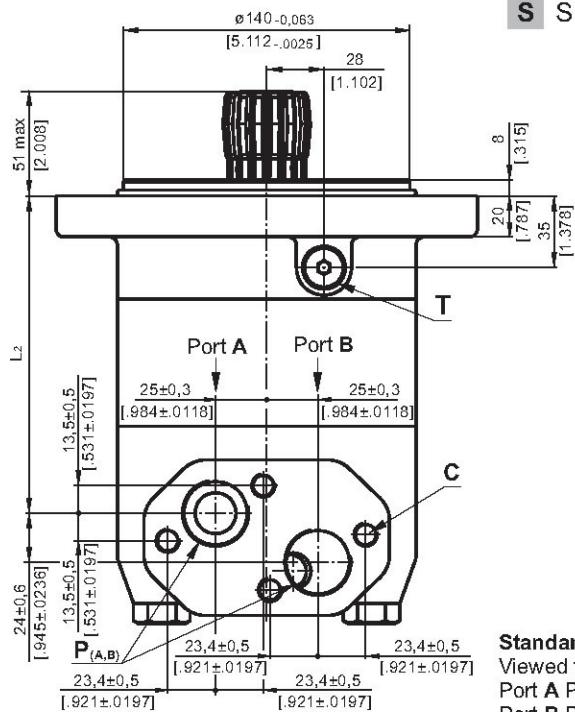



C: 4xM12 - 12 mm [.47 in] depth

P_(A,B): 2xG1 - 20 mm [.79 in] depth

T: G 1/4 - 12 mm [.47 in] depth

Standard Rotation
Viewed from Shaft End
Port A Pressurized - CW
Port B Pressurized - CCW


Reverse Rotation
Viewed from Shaft End
Port A Pressurized - CCW
Port B Pressurized - CW

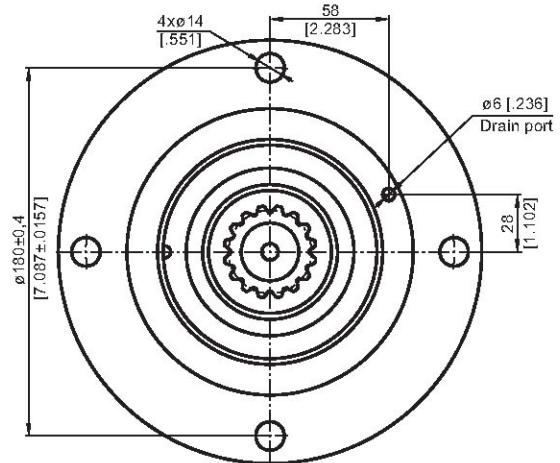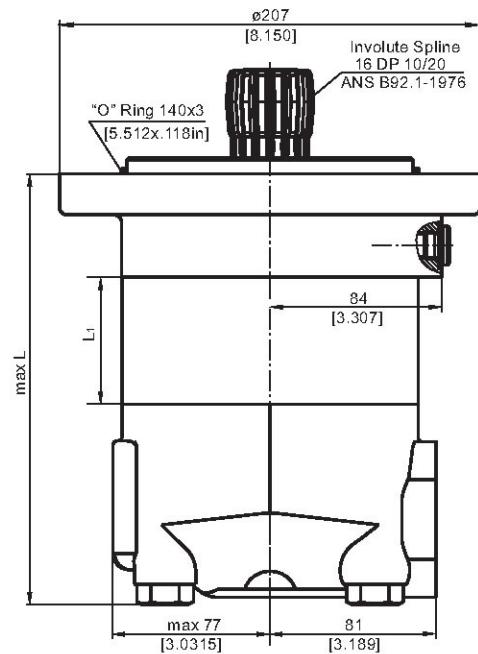

* The width of the roll-gerotor is 4 mm [.157 in] greater than L_1 .

DIMENSIONS OF THE ATTACHED COMPONENT

MVS

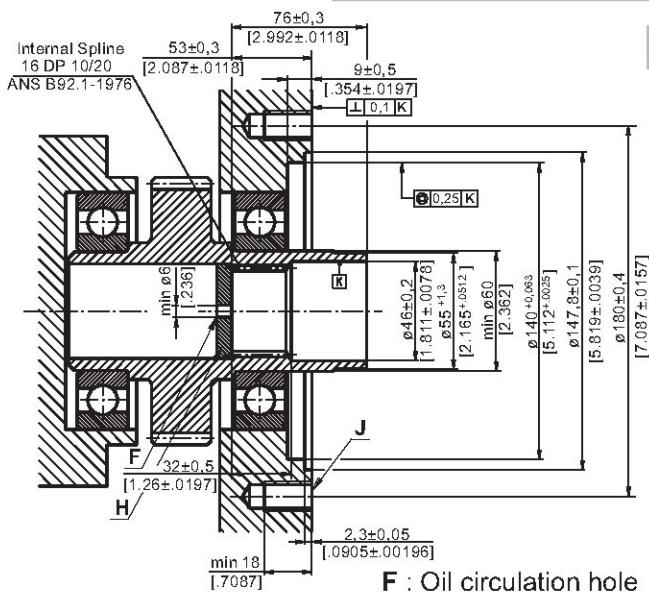


F : Oil circulation hole

G: Internal drain channel

H: Hardened stop plate


I : O-Ring 140x3mm [5.512x.118in]

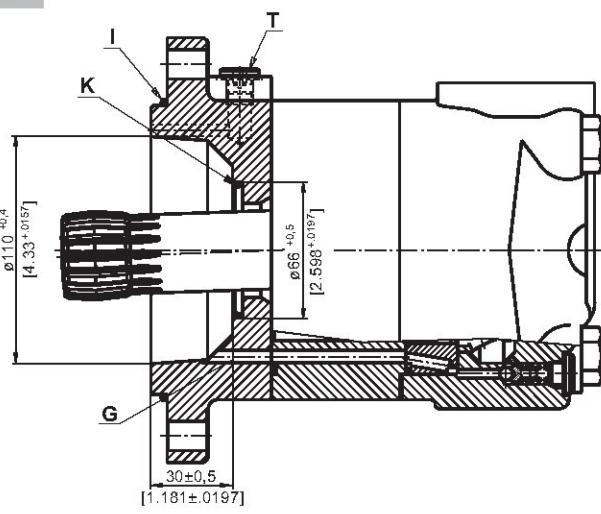

J: 4xM12-18 mm [.709 in] depth, 90°

K: Conical seal ring


T: Drain connection G1/4 - 12 mm [.47 in] depth



mm [in]

DIMENSIONS AND MOUNTING



V Very Short Mount

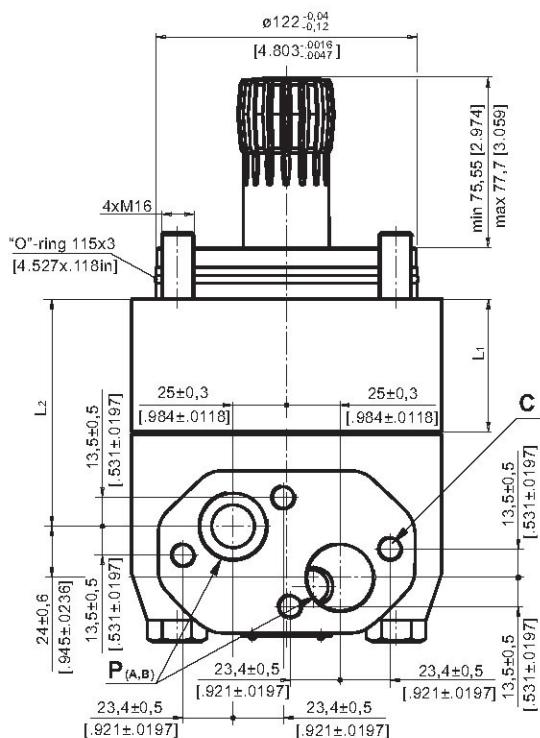

C: 4xM12 - 12 mm [.47 in] depth

P_(A,B): 2xG1 - 20 mm [.79 in] depth

Standard Rotation
Viewed from Shaft End
Port A Pressurized - CW
Port B Pressurized - CCW
Reverse Rotation
Viewed from Shaft End
Port A Pressurized - CCW
Port B Pressurized - CW

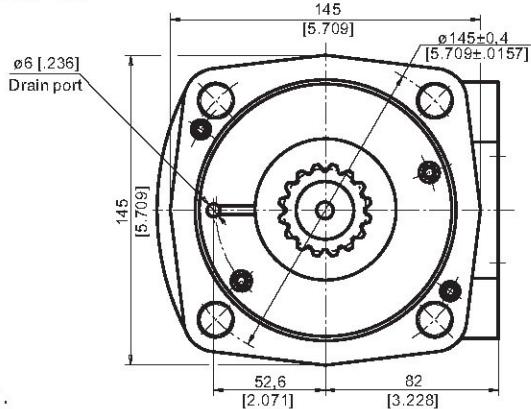
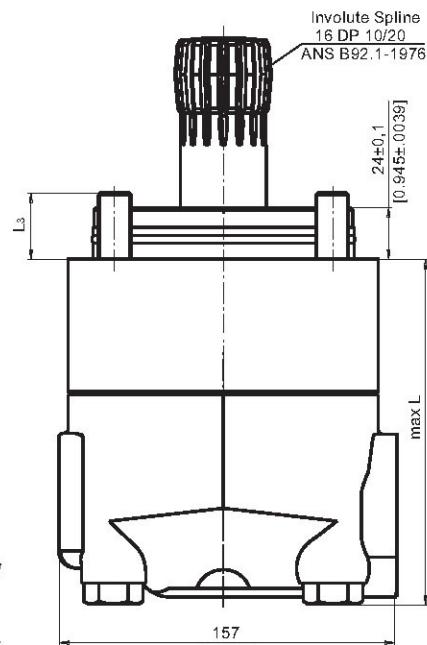


Type	L, mm [in.]	L ₂ , mm [in.]	L ₃ , mm [in.]	*L ₁ , mm [in.]
MVV 315	121,5 [4.78]	68 [2.68]	29,5 [1.16]	22,0 [0.87]
MVV 400	128,5 [5.06]	75 [2.95]	32,5 [1.28]	29,0 [1.14]
MVV 500	136,5 [5.37]	83 [3.27]	34,5 [1.36]	37,0 [1.46]
MVV 630	147,0 [5.79]	93 [3.66]	34,0 [1.34]	47,5 [1.87]
MVV 800	161,0 [6.34]	107,5 [4.23]	30,0 [1.18]	61,5 [2.42]

* The width of the roll-gerotor is 4 mm [.157 in] greater than L₁.


DIMENSIONS OF THE ATTACHED COMPONENT

MVV

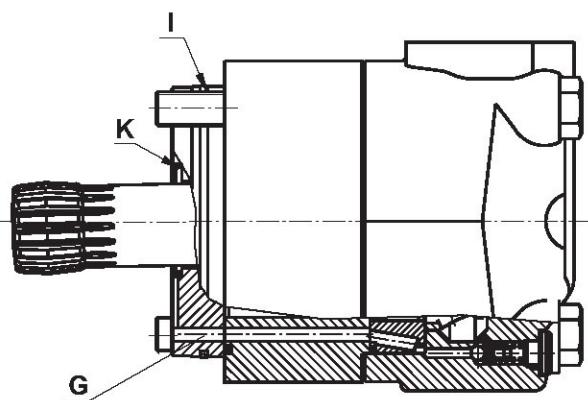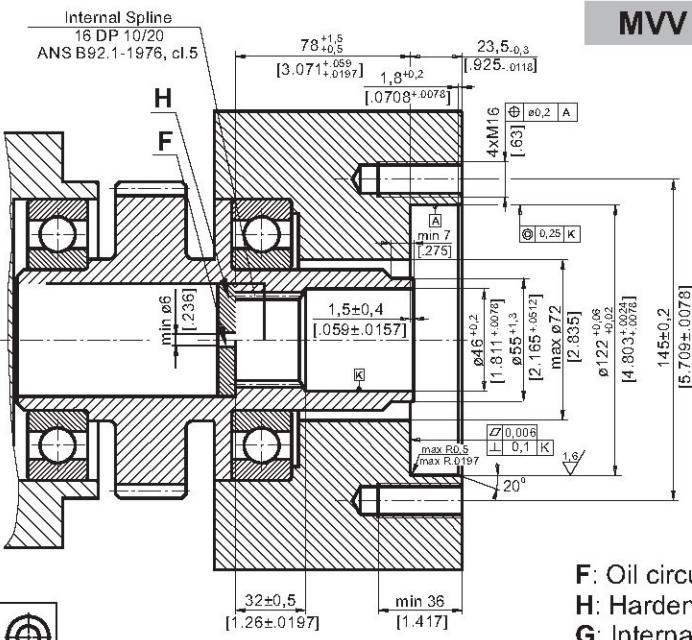

F: Oil circulation hole
H: Hardened stop plate
G: Internal drain channel

I : O- Ring 115x3mm [4.527x.118in]
K: Conical seal ring



mm [in.]

DRAIN CONNECTION

A drain line ought to be used when pressure in the return line can exceed the permissible pressure. It can be connected:

- For MVS at the drain port of the motor;
- For MVV at the drain connection of the attached component. The maximum pressure in the drain line is limited by the attached component and its shaft seal.


The drain line must be possible for oil to flow freely between motor and attached component and must be led to the tank. The maximum pressure in the drain line is limited by the attached component and its seal.

INTERNAL SPLINE DATA FOR THE ATTACHED COMPONENT

Standard ANS B92.1-1976, class 5

[$m=2.54$; corrected $x.m=+1,0$]

Fillet Root Side Fit	mm	inch
Number of Teeth z	16	.16
Diametral Pitch DP	10/20	10/20
Pressure Angle	30°	30°
Pitch Dia. D	40,640	1.6
Major Dia. Dri	45,2 ^{+0,4}	1.796÷1.780
Minor Dia. Di	38,5 ^{+0,039}	1.5175÷1.516
Space Width [Circular] Lo	5,18±0,037	.2055÷.2025
Fillet Radius R	0,4	.015
Max. Measurement L between Pins	32,47 ^{+0,15}	1.284÷1.278
Pin Dia. d	5,6±0,001	.22051÷.22043

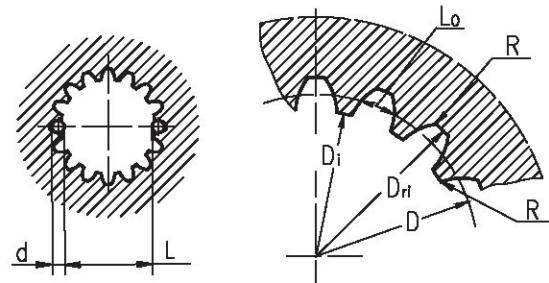


Hardening Specification:

HV=750±50 on the surface.

HV=560 at 0,7±0,2 mm [.035±.019in] case depth


Material: 20 MoCr4 EN 10084 or better.

MOTOR WITH TACHO CONNECTION

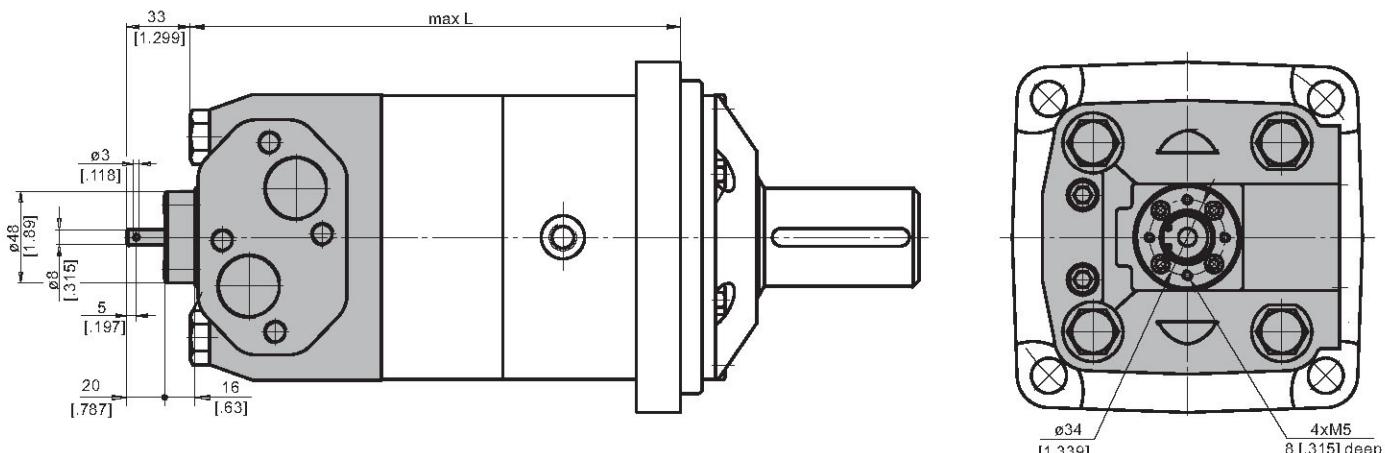


MAX. PERMISSIBLE SHAFT SEAL PRESSURE for MV motors

Max. return pressure without drain line or
max. pressure in the drain line

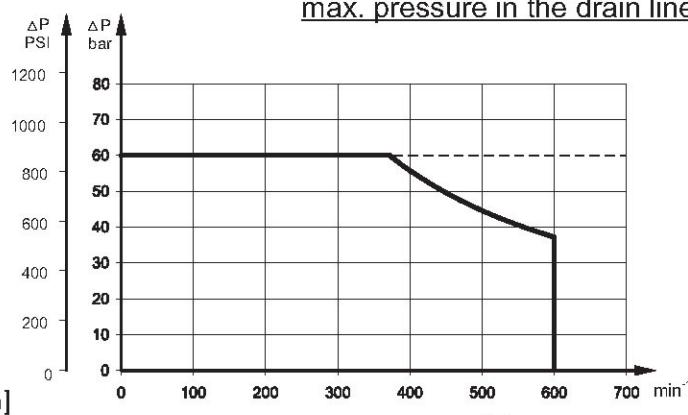


— - continuous operations
 - - - intermittent operations




mm [in]

SHAFT EXTENSIONS


C - ø50 straight, Parallel key A14x9x70 DIN 6885

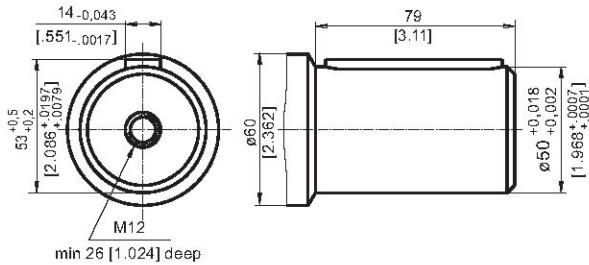



CO - ø2 1/4" [57,15] straight, Parallel key 1/2 "x1/2"x 2 1/4" BS46

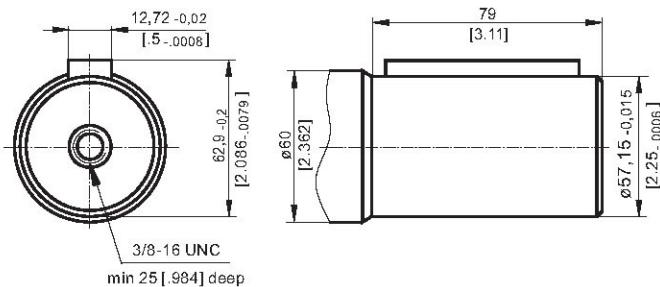

SH - ø2 1/8" splined, 16 DP 8/16 ANS B92.1-1976

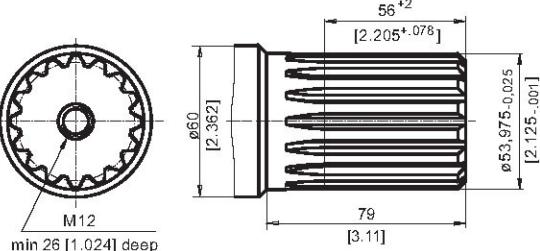

K - tapered 1:10, Parallel key B16x10x32 DIN 6885

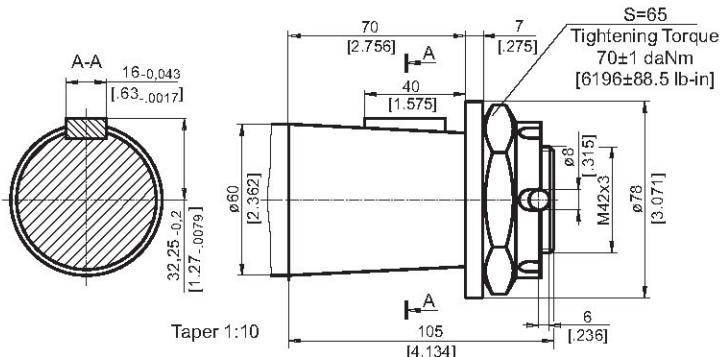

mm [in]

ORDER CODE

M	V	1	2	3	4	5
---	---	---	---	---	---	---

Pos. 1 - Mounting Flange

omit - Square mount, four holes

- C** - SAE C mount
- W** - Wheel mount
- S** - Short mount
- V** - Very short mount

Pos. 2 - Displacement code

- 315** - 314,5 cm³/rev [19.18 in³/rev]
- 400** - 400,9 cm³/rev [24.45 in³/rev]
- 500** - 499,6 cm³/rev [30.48 in³/rev]
- 630** - 629,1 cm³/rev [38.38 in³/rev]
- 800** - 801,8 cm³/rev [48.91 in³/rev]

Pos. 3 - Shaft extensions*

- omit - for **S** and **V** mounting flange
- C** - ø50 straight, Parallel key A14x9x70 DIN6885
- CO** - ø2 1/4" straight, Parallel key 1/2 "x1/2"x 2 1/4" BS46
- SH** - ø2 1/8" splined, ANS B92.1-1976
- K** - ø60 tapered 1:10, Parallel key B16x10x32 DIN6885

Pos. 4 - Special Features (see page 51)

Pos. 5 - Design Series

omit - Factory specified

NOTES:

* The permissible output torque for shafts must not be exceeded!

The hydraulic motors are mangano- phosphatized as standard.